



Smart Product Advantages



Smart Control

Easy to Use



Customizable


Energy Saving

GW-XD-L

Hot-air High-temp Disinfection Chamber

Products

11/12

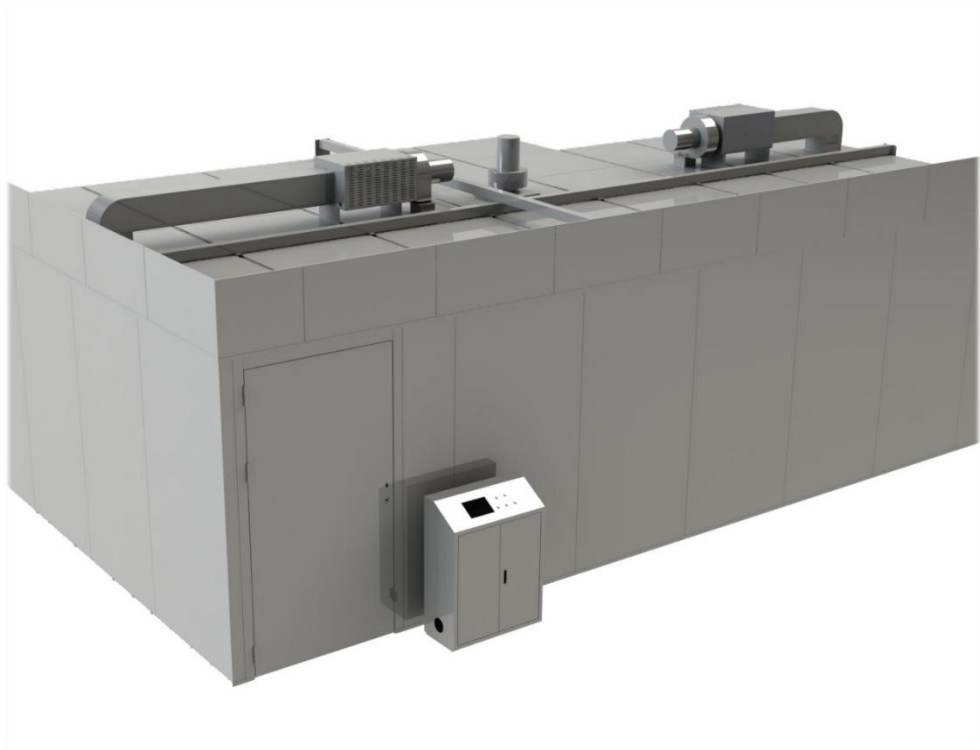

- Model: GW-XD-L
- Input Voltage: 380VAC; 50Hz

●

Rated Power: 72KW

●

Disinfection Time: >=15

●

Material: Stainless Steel

●

Disinfection Method: Hot Air Circulation

●

Disinfection Temperature: 80-120C

Product Description

- Uses circulating hot air to disinfect cleaned tableware, cutting boards, large basins, baskets and turnover containers.

Disinfection, drying and storage in one unit.


- Saves labor and reduces damage caused by repeated handling; ideal for large catering operations.

- Fully automatic operation helps prevent secondary contamination and keeps items ready for use.

- Automatically controls temperature and disinfection time; stops after completion and supports custom interval and start-up functions.



One-touch Operation



Smart Control




Unattended Operation



Energy Saving



Timed Temp. Control



Hot Air Circulation



Central Kitchen



School Canteen



Government /
Institution



Hotel

ZG-T-S

Trolley Steaming Cabinet



- Model: ZG-T-S

● Input Voltage: 220VAC
- Gas Demand: 100(m3/h)


● Built-in Trolley: 1 trolley*34 trays

● Material: Stainless Steel
- Serving Capacity: 500-700

● Size: 980x*1080*1900mm



One-touch Operation



Smart Control




Labor Saving



Energy Saving



Easy to Move



Hot Air Circulation



Central Kitchen



School Canteen



Government /
Institution



Hotel

-
- Connected to an external steam generator for rapid steam output and 360 deg circulating heating.
 - Large capacity, fast steaming and multi-purpose use; automatic operation helps prevent secondary contamination,

keeping items ready for immediate use.
 - Cyclopentane high-pressure foam insulation ensures good sealing, stable steam pressure and better heat retention.
 - Built-in trolley moves easily and greatly reduces labor intensity.
 - Steaming time and temperature are displayed clearly; set cooking time according to food requirements,

Product Information

ZG-T-P

Tunnel Trolley Steaming Cabinet



Model: ZG-T-P

Input Voltage: 220VAC

Gas Demand: 200(m3/h)

Built-in Trolley: 1 trolley*34 trays

Material: Stainless Steel

Serving Capacity: 500-700


Size: 980*1080*1900mm



- Connected to an external steam generator for rapid steam output and 360 deg circulating heating.
- Large capacity, fast steaming, high output and multi-purpose operation.
- Cyclopentane high-pressure foam insulation ensures good sealing, stable steam pressure and better heat retention.
- ◆ Built-in trolley moves easily and greatly reduces labor intensity.
- ◆ Steaming time and temperature are displayed clearly; set cooking time according to food requirements,
then the unit automatically enters standby after the set time.



One-touch Operation



Smart Control




Labor Saving



Energy Saving



Easy to Move



Hot Air Circulation



Central Kitchen



School Canteen



Government /
Institution



Hotel

HX-ZW-L30

Gas Steam Generator



● Model: HX-ZW-L30

● Input Voltage: 220VAC

● Power: 120W

● Burner Rows: 30Rows

● Evaporation Rate: 80kg/h

● Structure: Vertical


● Gas Type: Natural Gas / LPG



- Water capacity is under 30 L and the unit is not fully sealed, improving operating safety.
- Compact and flexible; no boiler room required, easy to install and operate.
- Direct-flow steam technology produces strong steam in 3-4 minutes, ready to use without preheating.
- Steam stops immediately after shutdown, saving preheating time and reducing hot-water waste.
- ◆ Smart control, easy operation, electronic pulse ignition and one-touch start/stop.
- ◆ Multiple safety protection devices ensure safe operation.



One-touch Operation



Smart Control



Labor Saving



Fast & Efficient



Multiple Safety Protection



Energy Saving



Chain Restaurant



School Canteen



Noodle Shop



Restaurant



Hot Pot / Mala Shop

HX-ZQ-L40

Gas Steam Generator



● Model: HX-ZQ-L40

● Input Voltage: 220VAC

● Power: 120W

● Burner Rows: 40Rows

● Evaporation Rate: 100kg/h

● Structure: Vertical


● Gas Type: Natural Gas / LPG



- Water capacity is under 30 L and the unit is not fully sealed, improving operating safety.
- Compact and flexible; no boiler room required, easy to install and operate.
- Direct-flow steam technology produces strong steam in 3-4 minutes, ready to use without preheating.
- Steam stops immediately after shutdown, saving preheating time and reducing hot-water waste.
- ◆ Smart control, easy operation, electronic pulse ignition and one-touch start/stop.
- ◆ Multiple safety protection devices ensure safe operation.



One-touch Operation



Smart Control



Labor Saving



Fast & Efficient



Multiple Safety Protection



Energy Saving



Chain Restaurant



School Canteen



Noodle Shop



Restaurant



Hot Pot / Mala Shop

ECO-10-N-18

Commercial Gas Constant-temp Water Heater



●

Model: ECO-10-N-18

●

Input Voltage: 220VAC

●

Rated Heat Load: 35KW

●

Water Output: 500L/h

●

Rated Temperature: 80C

●

Natural Gas Consumption: approx.2.5m3/h

●

Combustion Noise Level



- Links with the dishwasher: when water intake starts, the heater supplies hot water automatically;

when the dishwasher stops, the heater shuts off and enters standby.

- Heats tap water from room temperature to above 85 degC within 20 seconds and keeps output temperature stable.


- High output up to 500 L/h, supplying more than 10 spray heads at the same time.

- ◆ Can supply hot water to soaking tanks and multiple points for multi-purpose use.
- ◆ Enables high-power dishwashers where electric capacity is limited, giving restaurants more site flexibility.

- Gas water heaters are more thermally efficient than electric models, lowering operating cost.



One-touch Operation



Smart Control



Labor Saving



Fast & Efficient



Multiple Safety Protection



Energy Saving



Chain Restaurant



School Canteen



Noodle Shop



Restaurant



Hot Pot / Mala Shop

HK-JD-1

Bubble Defrosting Tank



● Model: HK-JD-1	● Input Voltage: 220VAC
● Power: 1KW	● Size: 2400x1000x1000
● Water Capacity: 0.8m3	● Tank Size: 2200*835*500mm



- Simple operation with one-touch start.
- Waterproof design for safer, more reliable use.
- Enlarged water inlet for fast filling.
- ◆ 采用 Hockey-stick style drain makes discharge faster and easier.
- ◆ Standard perforated basket separates residue and drains water.



One-touch Operation



Fast & Efficient



Energy Saving



High Heat Conversion



Central Kitchen



School Canteen



Government /
Institution



Hotel



Chain Restaurant



Noodle
Shop



Restauran
t



Hot Pot / Mala
Shop

HK-ZF-D3

Three-door Seafood Steamer



● Model: HK-ZF-D3	● Input Voltage: 380VAC
● Power: 6KW+6KW+9KW	● Size: 900*850*1850mm
● Natural Gas Consumption: approx.2.5m3/h	● Structure: Three-door Independent



- Smart three-door electric steamer has three independent steam generators, each serving one chamber;

each steaming chamber can be switched independently as needed.


- Simple smart control panel makes operating status clear at a glance.

- Independent time and temperature controls adapt to different dishes.

◆ Detailed design: anti-scald handle, dry-burn protection, low-water protection, safety relief valve and auto water refill.



One-touch Operation



Smart Control



Multiple Safety Protection



Fast & Efficient



Timed Temp. Control



High Heat Conversion



Chain Restaurant



School Canteen



Restaurant



Government / Institution



Hotel

HK-ZF-ZN

Smart Three-door Steaming Cabinet



- Model: HK-ZF-ZN
- Input Voltage: 380VAC
- Power: 4.5KW+4.5KW+6KW
- Size: 550*730*1680mm
- Seafood Steaming Time: 7-12
- Structure: Smart Independent

Intelligent Control

- Smart three-door electric steamer has three independent steam generators, each serving one chamber;

each steaming chamber can be controlled independently as needed.

- Independent digital display on each layer for visible, precise cooking.


- Independent time and temperature controls adapt to different dishes.

◆ Menu preset function: each chamber can store six cooking programs for consistent dish quality.

- Detail-focused design with anti-scald handle and dry-burn protection.



One-touch Operation



Smart Control



Multiple Safety Protection



Fast & Efficient



Timed Temp. Control



High Heat Conversion



Chain Restaurant



School Canteen



Restaurant



Government / Institution



Hotel

HK-ZF-ZF

Side-opening Four-door Steaming Cabinet



● Model: HK-ZF-ZF	● Input Voltage: 380VAC
● Power: 6KW+6KW+6KW	● Size: 760*760*1800mm
● Seafood Steaming Time: 7-12	● Structure: Side-opening Four-door Smart



- Smart four-door electric steamer has four independent steam generators, each serving one chamber;

each steaming chamber can be controlled independently as needed.

- Independent digital display on each layer for visible, precise cooking.


- Independent time and temperature controls adapt to different dishes.

◆ Menu preset function: each chamber can store six cooking programs for consistent dish quality.

- Detail-focused design with anti-scald handle and dry-burn protection.



One-touch Operation



Smart Control



Multiple Safety Protection



Fast & Efficient



Timed Temp. Control



High Heat Conversion



Chain Restaurant



School Canteen



Restaurant



Government / Institution



Hotel

HK-ZF-ZT

Countertop Double-door Steaming Cabinet



● Model: HK-ZF-ZT	● Input Voltage: 380VAC
● Power: 4.5KW+4.5KW	● Size: 730*730*80mm
● Seafood Steaming Time: 7-12	● Structure: Countertop Double-door Smart



- Smart side-opening two-door steamer has two independent steam generators, each serving one chamber.

Each chamber is controlled independently, with a digital display on each layer.

- Smart LCD screen makes cooking status visible.


◆ Menu preset function: each chamber can store six cooking programs for consistent dish quality.

- Compact size and economical price.

- Detail-focused design with anti-scald handle and dry-burn protection.



One-touch Operation



Smart Control



Multiple Safety Protection



Fast & Efficient



Timed Temp. Control



High Heat Conversion



Chain Restaurant



School Canteen



Restaurant



Government / Institution




Hotel

Gas Three-door Seafood Steamer



One-touch Operation



Smart Control



Multiple Safety Protection



Fast & Efficient



Timed Temp. Control



High Heat Conversion



Chain Restaurant



School Canteen

Restaurant
tGovernment /
Institution

Hotel

Model: HK-ZF-QA

- Input Voltage: 220VAC

● Gas Consumption: 0.8m³/h

● Size: 900*850*18500mm

- Rice Steaming Time: 40min

- Structure: Gas Three-door

- Built-in steam generator, electronic ignition and one-touch start.

- Waterproof button for safe and reliable operation.

- Large knob for precise flame control.

- Running indicator clearly shows equipment status.

- Detail-focused design with anti-scald handle, dry-burn protection, low-water protection, relief valve and auto refill.





HK-ZM-DS6

Six-basket Electric Lifting Noodle Boiler (Digital)



● Model: HK-ZM-DS6

● Input Voltage: 380VAC; 50Hz

● Rated Power: 6KW+6KW

● Basket Diameter: 150mm

● Heat Source: Induction

● Control Method: Button Control


● Product Size: 550*800*800mm



- Six menu settings with flexible timed temperature control.
- One-touch lifting operation, convenient and hygienic.
- Preset cooking time and temperature; cook six foods at once and lift each basket automatically when ready.
- Saves time and labor.
- Continuous rolling boil resumes within 3 seconds after food is lowered, heating evenly and locking in nutrition.
- Preserves original flavor and texture.
- Attractive, durable, safe, hygienic, easy to clean and multi-purpose.



One-touch Operation



Smart Control



Labor Saving



Fast & Efficient



Timed Temp. Control



High Heat Conversion



Chain Restaurant



School Canteen



Noodle Shop



Hot Pot / Mala Shop



Claypot Stove

Chinese Cooking Equipment



Single-burner Wok Range with Rear Pot



Double-burner Wok Range with Rear Pot

ing Range With Rear Water Pot



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-CL-1010	1000x950x1150mm	550w/220v
NK-CL-1115	1100x950x1250mm	550w/220v
NK-CL-1212	1250x1250x1250mm	550w/220v

Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-CL-1810	1800x950x1150mm	550w/220v

Model	Gas Type	Ignition Method	Thermal Efficiency	Product Size
Model	Air Source	Ignition Method	Thermal Efficiency (Kw)	Dimensions (mm)
1 Burner	Natural Gas LPG	Electronic Pulse	5.5	300*415*150
4 Burners	Natural Gas LPG	Electronic Pulse	22	600*800*185+100
8-burner Cabinet Type	Natural Gas LPG	Electronic Pulse	44	1350*800*800

Cantonese Double Wok Range with Twin Rear Pots



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-CL-2010	2000x1000x1150mm	550w/220v
NK-CL-2111	2150x1150x1250mm	550w/220v
NK-CL-2212	2200x1250x1250mm	550w/220v
NK-CL-2412	2400x1250x1250mm	550w/220v

Huaiyang Double Wok Range with Twin Rear Pots



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-CL-2212	2200x1250x1250mm	550w/220v

Single Steamer and Single Wok Range

ate Single Fry



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-CL-1810	1800x1000x1150mm	550w/220v
NK-CL-2012	2000x1250x1250mm	550w/220v
NK-CL-2010	2000x1000x1150mm	550w/220v

Double Steaming Range

Woks



	Model	Dimensions	Rated Power
	Molde	Dimensions	Rated Power
NK-ZL-2012		2000x1150x1250mm 750w/220v(Water-tank Type)	
NK-ZL-2012		2000x1150x1250mm 750w/220v(Soup-pot Type)	

Single Wok and Single Stock Pot Range

se Steamer



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-GL-2212	2200x1250x1250mm	550w/220v

Single Steaming Range

Woks



	Model	Dimensions	Rated Power
	Molde	Dimensions	Rated Power
NK-ZL-1010		900x950x1150mm	550w/220v
NK-ZL-1212		1200x1150x1250mm	550w/220v

Double Stock Pot Range

king Range



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-GL-2111	2150x1150x1250mm	550w/220v
NK-GL-2212	2200x1250x1250mm	550w/220v
NK-GL-2313	2300x1300x1250mm	550w/220v

Double Noodle Boiler

oks



	Model	Dimensions	Rated Power
	Molde	Dimensions	Rated Power
NK-ZL-1580		1500x800x950mm 6w/220v(Water-tank Type)	
NK-ZL-1580		1500x800x1250mm	Natural Draft

Single Stock Pot Range

eamer



	Model	Dimensions	Rated Power
	Molde	Dimensions	Rated Power
NK-GL-2111		1100x1150x1250mm	550w/220v
NK-GL-2212		1200x1250x1250mm	550w/220v

Double-tray Rice Roll Steamer

Steamer



	Model	Dimensions	Rated Power
	Molde	Dimensions	Rated Power
NK-CFL-1210		1200x1000x1150mm	550w/220v
NK-CFL-1212		1200x1250x1250mm	550w/220v

Steam-generator Three-door Seafood Steamer

Cabinet



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK04-01	900x800x1800mm	180w/220v
NK04-02	1200x800x1800mm	180w/220v
NK04-03	1000x800x1800mm	180w/220v

Power):48KW

Three-door Seafood Steamer

ood Steamed Ark



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-YS-A0012	1200x1000x1850mm	550w/220v
NK-YS-A0013	900x850x1850mm	550w/220v

Power):48KW

Electric Rice Steaming Cabinet

eamed rice ark



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-YS-A0015	730x640x1050mm	6kw/220v
NK-YS-A0016	730x640x1220mm	9kw/220v
NK-YS-A0017	730x640x1390mm	11kw/380v
NK-YS-A0018	730x640x1560mm	11kw/380v
NK-YS-A0019	730x640x1560mm	22kw/380v

Weight(Weight):45Kg,55Kg,65Kg,75Kg,135Kg

Six-burner Claypot Stove

g Furnace



Four-burner Claypot Stove

g Furnace



Double Stock Pot Stove

t Son Furnace



Single Stock Pot Stove

t Son Furnace



Model	Dimensions	Heat Output
Molde	Dimensions	Burner Rating
NK-YS-A0024	900x800x950mm	33kw

Cooktop uses premium 201# 0.8 mm stainless steel and cast-iron burner rings; ~~factory~~ ~~work~~ ~~design~~ ~~ship~~.

Model	Dimensions	Heat Output
Molde	Dimensions	Burner Rating
NK-YS-A0025	600x800x950mm	33kw

Cooktop uses premium 201# 0.8 mm stainless steel and cast-iron burner rings; ~~factory~~ ~~work~~ ~~design~~ ~~ship~~.

Model	Dimensions	Rated Power	Voltage
Molde	Dimensions	Rated Power	Voltage
NK-PL-1480	1400x700x1150/1250mm	550w	220v

	Model	Dimensions
Molde		Dimensions
NK-PL-78G		700x700x1150/1250mm
NK-PL-78Z		700x800x1150/1250mm

Note(Note):Forced DraftNatural Draft

Roast Goose Oven (Gas or Charcoal)



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-TSL-8013	Φ800x1300mm	/
NK-TSL-9013	Φ900x1300mm	/
NK-RSL-1015	Φ1000x1500mm	/

Roast Pig Oven (Gas or Charcoal)



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-TSL-1060	1000x600x600mm	/
NK-TSL-1265	1200x650x600mm	/

Single Induction Wok Range



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-DC1A-7015	L1000xW1100xH800+400	15kw/380v
NK-DC1B-7015	L1000xW1150xH800+400	15kw/380v

Note(Note):PotDia.700

Double Induction Wok Range



Model	Dimensions	Rated Power
Molde	Dimensions	Rated Power
NK-DC2A-8020	L2000xW1100xH800+400	20kwx2/380v
NK-DC2B-8020	L2000xW1150xH800+400	20kwx2/380v

Note(Note):PotDia.800

Single / Double Pass Worktable



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK09-01	1200x600x800mm	201/304-0.8-1.5mm
NK09-02	1500x600x800mm	
NK09-03	1800x600x800mm	
NK09-04	1500x800x800mm	
NK09-05	1800x800x800mm	

Wall-side Single Pass Worktable



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK-13C-1580	1500x800x950mm	/
NK-13C-1800	1800x800x950mm	/

Drawer Worktable Cabinet



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK-H01	1800x700x800mm	/
NK-H02	1500x700x800mm	/

Mobile Four-drawer Floor Cabinet / Mobile Collection Cart



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK09-06	1160x540x1400mm	201/304-1.0-1.5mm
NK09-07	1180x550x1260mm	201/304-1.0-1.5mm

Double Workbench

Workbench



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK-15B-1580	1500x800x800mm	/
NK-15B-1880	1800x800x800mm	/
NK-15B-2010	2000x1000x800mm	/

Three-tier Worktable

Worktable with Under Shelf



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK-15A-1260	1200x600x800mm	/
NK-15A-1280	1200x800x800mm	/
NK-15A-1580	1500x800x800mm	/
NK-15A-1880	1800x800x800mm	/

Waste Collection Table

Waste Collection Table



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK-15D-1270	1200x700x950mm	/
NK-15D-1570	1500x700x950mm	/

Wood-top Prep Table

Wooden /Plastic Cutting Board



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK10-01	1500x800x800mm	/
NK10-02	1800x800x800mm	/
NK10-03	2000x1000x800mm	/

Four-door Storage Cabinet

Locker



Three-door Flip-up Storage Cabinet

Storage Cabinet



Four-door Mesh Storage Cabinet

Mesh Storage Cabinet



Single Sink Bench

Single Sink Bench



Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK-YS-B0052	1000x500x1800mm	201/304-0.8-1.5mm
NK-YS-B0053	1200x500x1800mm	201/304-0.8-1.5mm

Made of premium 201# 0.8 mm stainless steel with fine workmanship, corrosion and moisture-resistant; in daily use is worry-free and long-term use resists rust.

Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK11-01	1000x500x1800mm	201/304-0.8-1.5mm
NK11-02	1200x500x1800mm	201/304-0.8-1.5mm
NK11-03	1500x500x1800mm	201/304-0.8-1.5mm

Solid stainless steel with an attractive surface, good corrosion resistance and clean composition and moisture-resistant; water contact in daily use is worry-free and long-term use resists rust.

Model	Dimensions	Material Thickness
Molde	Dimensions	Material Thickness
NK-14A-1150	1100x500x1800mm	201/304-0.8-1.5mm
NK-14A-1250	1200x500x1800mm	201/304-0.8-1.5mm
NK-14A-1560	1500x600x1800mm	201/304-0.8-1.5mm

Solid stainless steel with an attractive surface, good corrosion resistance and clean composition and moisture-resistant; water contact in daily use is worry-free and long-term use resists rust.

Model	Dimensions	Notes
Molde	Dimensions	Note
NK-19D-6060	600x600x950mm	/
NK-19D-7070	700x700x950mm	/
NK-19D-1070	1000x700x950mm	/
NK-19D-1280	1200x800x950mm	/
NK-GQX-02A	450x450x280+40mm	1.0-1.5mm
NK-GQX-02B	400x400x280+40mm	1.0-1.5mm

Triple Sink Bench

al Triple Sink Bench



Model	Dimensions	Notes
Molde	Dimensions	Note
NK-19A-1870	1800x700x950mm	/
NK-19A-2180	2100x800x950mm	/

Double Sink Bench

ashing Machine



Model	Dimensions	Notes
Molde	Dimensions	Note
NK-19B-1270	1200x700x950mm	/
NK-19B-1670	1600x700x950mm	/
NK-19B-1870	1800x700x950mm	/

Single Sink Cutting Board Table

enly Body Wash Machine



Model	Dimensions	Notes
Molde	Dimensions	Note
NK-19C-1070	1000x700x950mm	/
NK-19C-1570	1500x700x950mm	/
NK-19C-1870	1800x700x950mm	/

Four-tier Flat Shelf (Assembly Type)

Dish Rack



Model	Dimensions	Packing Size
Molde	Dimensions (mm)	Packing Size (mm)
NK-SCPB-100	1000x500x1550	1050x550x180
NK-SCPB-120	1200x500x1550	1250x550x180
NK-SCPB-150	1500x500x1550	1550x550x180
NK-SCPB-200	2000x500x1550	2050x550x180

Four-tier Perforated Shelf (Assembly Type)

Dish Rack



Model	Dimensions	Packing Size
Molde	Dimensions (mm)	Packing Size (mm)
NK-SCCK-100	1000x500x1550	1050x550x180
NK-SCCK-120	1200x500x1550	1250x550x180
NK-SCCK-150	1500x500x1550	1550x550x180
NK-SCCK-180	1800x500x1550	1850x550x180
NK-SCCK-200	2000x500x1550	2050x550x180

Four-tier Slatted Shelf (Assembly Type)

sh Rack



Model	Dimensions	Packing Size
Molde	Dimensions (mm)	Packing Size (mm)
NK-SCST-100	1000x500x1550	1050x550x180
NK-SCST-120	1200x500x1550	1250x550x180
NK-SCST-150	1500x500x1550	1550x550x180
NK-SCST-180	1800x500x1550	1850x550x180
NK-SCST-200	2000x500x1550	2050x550x180

Range Spacer Plate

ce Puzzle



	Model Dimensions	Notes
Molde	Dimensions	Note
NK14-01	400x1100x1200mm	Custom-made

European Wall-mounted Rack

Wall Stand eel European Style



	Model Dimensions	Notes
Molde	Dimensions	Note
NK14-02	1800x350x350mm	/
NK14-03	1500x350x350mm	/
NK14-04	1200x350x350mm	/



Stainless Steel & Water Boilers

Western Cooking Equipment



	Model	Dimensions	
Molde	Dimensions	Note	
NK-CJ04	470x620x1735mm	/	

Notes



Gas Double-tank Four-basket Fryer with Cabinet

With cabinet

Model	Dimensio ns	Weight
Model	Dimensions(mm)	Weight
NK-JS-RFx2	800x900x850	/

Notes



Gas Half-grooved Griddle with Cabinet

binet

Model	Dimensio ns	Weight
Model	Dimensions	Weight
NK-JS-RP	800x900x850mm	/



	Model	Dimensions	
Molde	Dimensions	Note	
NK-17D-1550	1500x500x1600mm	/	
NK-17D-1250	1200x500x1600mm	/	

Fully Automatic Step-type Electric Water Boiler



No.	Model	Dimensions	Rated Power
Item	Model	Dimensions	Rated Power
NK16-01	ZBT02-A1	180x360x520mm	2w/220v
NK16-02	ZBT03-A1	180x360x620mm	3w/220v
NK16-03	ZBT02-B1	230x250x650mm	2w/220v
NK16-04	ZBT03-B1	230x250x750mm	3w/220v

Fully Automatic Stainless Steel Electric Water Boiler



Model	Dimensions	Rated Power	Capacity
Model	Dimensions	Rated Power	Volume
NK-AV-3	450x390x690mm	3kw/220,380v	30L
NK-AV-9	560x390x860mm	9kw/220,380v	60L
NK-AV-21	630x450x1360mm	21kw/380v	160L

Countertop Electric Griddle

Electric Griddle



Model	Dimensions	Power	Weight
Model	Dimensions	Power	Weight
NK-TGH-21	600x600x350mm	5kw	43Kg

Voltage):220-240v (Grilled board size):536x330x16mm

Countertop Electric Lava Rock Grill

Rock Grill



Model	Dimensions	Power	Weight
Model	Dimensions	Power	Weight
NK-THS-150	600x600x350mm	7.2kw	38Kg

Voltage):220-240v

Gas Claypot Stove



Model	Dimensions	Power	Weight
Model	Dimensions	Power	Weight
NK-TB-4R	570x612x470mm	/	39kg

Total B-mer Power:92(87.600BTU/hr

Electric Flat Griddle



Model	Dimensions	Power	Weight
Model	Dimensions	Power	Weight
NK-TM-6	600x600x350mm	6kw	25Kg

Voltage):220-240v



Food Processing

Disinfection Cabinet

Dual-action Dough Mixer

Spiral Mixers

HS80A
HS100A
HS130A
HS200A



Model	Overall Dimensions	Voltage	Power	Frequency	Bowl Volume	Weight
Molde	Dimensions	Voltage	Power	Frequency	Bowl volume	Refrigeraton
NK-HS80A	1122x682x1305mm	3~380v	1.5/2.4kw	50Hz	80L	439kg
NK-HS100A	1160x650x1340mm	3~380v	3/4.5kw	50Hz	100L	482kg
NK-HS130A	1222x750x1430mm	3~380v	2.8/5.6kw	50Hz	130L	522kg
NK-HS200A	1332x950x1510mm	3~380v	5/7.5kw	50Hz	200L	695kg



QS Series High-efficiency Food Chopper



A knife with big S shape, which has long bladewire. So it has the highest cutting efficiency and the best cutting effect.

High-grade stainless steel material pail elaborately it has huge capacity and could be used safely and according with food hygiene requirements. The cover of material pail with perspective window is easy to control the cutting period for the operator.



Pork



Capsicum



Ginger



Garlic



Model	Overall Dimensions	Voltage	Input Power	Frequency	Bowl Volume	Waterproof Rating	Mixing Speed	Weight
Molde	Dimensions	Voltage	Input power	Frequency	Bowl volume	Ipno	Mixing speed	Weight
NK-QS503A	230x300x480mm	~220v	0.88kw	50Hz	3L	IPX1	1400 r/min	32kg
NK-QS503	230x300x480mm	3~380v	0.88kw	50Hz	3L	IPX1	1400 r/min	32kg
NK-QS505A	305x380x530mm	~220v	1.9kw	50Hz	5L	IPX1	1400 r/min	39kg
NK-QS505	305x380x530mm	3~380v	1.9kw	50Hz	5L	IPX1	140/2800 r/min	39kg
NK-QS508A	370x445x615mm	~220v	3.5kw	50Hz	8L	IPX1	1400 r/min	56kg
NK-QS508	370x445x615mm	3~380v	1.9kw	50Hz	8L	IPX1	1400 r/min	56kg
NK-QS513	420x680x720mm	3~380v	5.2kw	50Hz	13L	IPX1	1300/2600 r/min	140kg
NK-QS515	420x680x770mm	3~380v	5.2kw	50Hz	15L	IPX1	1300/2600 r/min	143kg



Meat Grinder, Deluxe
Model: TJ22A/TJ22B
Size: 400x240x450mm
~220/3~380v, 50Hz
Motor Power: 0.75kw
Capacity: 220kg/h
Net Weight: 36kg



Slicer
Model: NK-250ES-10
Size: 470x280x380mm
220v, 50Hz
Motor Power: 180w
Blade Diameter: Dia. 250mm
Net Weight (Weight): 14.3kg



Dough Sheeter
Model: NK-MT320
Size: 470x280x380mm
3~380v
Motor Power: 1.5kw



Four-function Mixer
Model: B20F
Size: 470x280x380mm
220v/380v
Motor Power: 0.75kw
Capacity: 20L



Vertical Disinfection Cabinet
Model: RTP680A-2
Size: 720x535x1650mm
220v/50Hz
Motor Power: 1.8kw
Capacity: 350L
Disinfection Method



Vertical Disinfection Cabinet
Model: NK-RTP680A-2
Size: 1150x480x1620mm
220v/50Hz
Motor Power: 2.4kw
Capacity: 680L
Disinfection Method



Vertical Disinfection Cabinet
Model: NK-RTP680A
Size: 720x535x1650mm
220v/50Hz
Motor Power: 5.4kw
Capacity: 1800L
Disinfection Method



Jindun Tableware Disinfection Cabinet
Model: NK-YTP-198XKA/B
Size: 580x515x1180mm
220v/50Hz
Motor Power: 600w
Capacity: 190L
Temperature Range: 70 degC
Ozone Concentration: >=20mg/m3



Jindun Tableware Disinfection Cabinet
Model: NK-YTP-298XKA/B
Size: 580x515x1440mm
220v/50Hz
Motor Power: 600w
Capacity: 290L
Temperature Range: 70 degC
Ozone Concentration: >=20mg/m3



Jindun Tableware Disinfection Cabinet
Model: NK-YTP-398XKA/B
Size: 580x515x1690mm
220v/50Hz
Motor Power: 900w
Capacity: 390L
Temperature Range: 70 degC
Ozone Concentration: >=20mg/m3



Jindun Tableware Disinfection Cabinet
Model: NK-YTP-438XKA/B
Size: 580x515x1690mm
220v/50Hz
Motor Power: 900w
Capacity: 390L
Temperature Range: 70 degC
Ozone Concentration: >=20mg/m3



Jindun Tableware Disinfection Cabinet
Model: NK-YTP-1200XKA/B
Size: 1175x515x1690mm
220v/50Hz
Motor Power: 1800w
Capacity: 800L
Temperature Range: 70 degC
Ozone Concentration: >=20mg/m3



Air-cooled Salad Counter



Backsplash Prep Refrigerator



Worktop Refrigerator

D0.25L2BMagnetic-seal Door/D0.48L2BMagnetic-seal Door/D0.25L2Magnetic-seal Door/D0.48L2Magnetic-seal Door						
Model	Overall Dimensions	Rated Voltage	Input Power	Capacity	Temperature Range	Cooling Type
Molde	Dimensions	Rated Voltage	Power	Capacity	Temperature	Refrigeraton
NK-D0.25L2BHorizontal-handle Door	500x630x950mm	220v	230w	0.28m³	0~-10°C	Direct Cooling
NK-D0.48L2BHorizontal-handle Door	800x800x950mm	220v	280w	0.48m³	0~-10°C	Direct Cooling
NK-D0.25L2BHorizontal-handle Door	500x630x800mm	220v	230w	0.28m³	0~-10°C	Direct Cooling
NK-D0.48L2BHorizontal-handle Door	800x800x800mm	220v	280w	0.48m³	0~-10°C	Direct Cooling
NK-D0.25L2BMagnetic-seal Door	1500x800x950mm	220v	280w	0.39m³	0~-12°C	Direct Cooling
NK-D0.48L2BMagnetic-seal Door	1800x800x950mm	220v	300w	0.48m³	0~-12°C	Direct Cooling
NK-D0.25L2BMagnetic-seal Door	1500x800x800mm	220v	280w	0.39m³	0~-12°C	Direct Cooling
NK-D0.48L2BMagnetic-seal Door	1800x800x800mm	220v	300w	0.48m³	0~-12°C	Direct Cooling

Quality compressor, copper piping, high-density foaming, electronic precision temperature control and self-closing door.



Two-door Upright Freezer
D0.6LSingle-compressor
Single-temp
D0.6L2Single-compressor
Single-temp




Four-door Freezer
D1.0L2Single-compressor Single-temp/D1.3L2Dual-compressor Dual-temp
D1.0L4Single-compressor Single-temp/D1.3L4Dual-compressor Dual-temp
D1.6L3Dual-compressor
Dual-temp




Model	Overall Dimensions	Rated Voltage	Input Power	Capacity	Temperature Range	Cooling Type
Molde	Dimensions	Rated Voltage	Power	Capacity	Temperature	Refrigeraton
NK-D0.6Lsingle Temp.	710x660x1950mm	220v	300w	0.6m³	0~-16°C	Direct Cooling
NK-D0.6L2single Temp.	710x660x1950mm	220v	300w	0.6m³	0~-16°C	Direct Cooling
NK-D1.0L2single Temp.	1220x760x1950mm	220v	430w	1.0m³	0~-16°C	Direct Cooling
NK-D1.3L2double Temp.	1380x760x1950mm	220v	600w	1.3m³	0~-16°C	Direct Cooling
NK-D1.0L4single Temp.	1220x760x1950mm	220v	430w	1.0m³	0~-16°C	Direct Cooling
NK-D1.3L4double Temp.	1380x760x1950mm	220v	600w	1.3m³	0~-16°C	Direct Cooling
NK-D1.6L3double Temp.	1820x760x1950mm	220v	680w	1.6m³	0~-16°C	Direct Cooling
NK-D1.6L6double Temp.	1820x760x1950mm	220v	680w	1.6m³	0~-16°C	Direct Cooling

Dishwashing Area & Conveyors
Application Layout

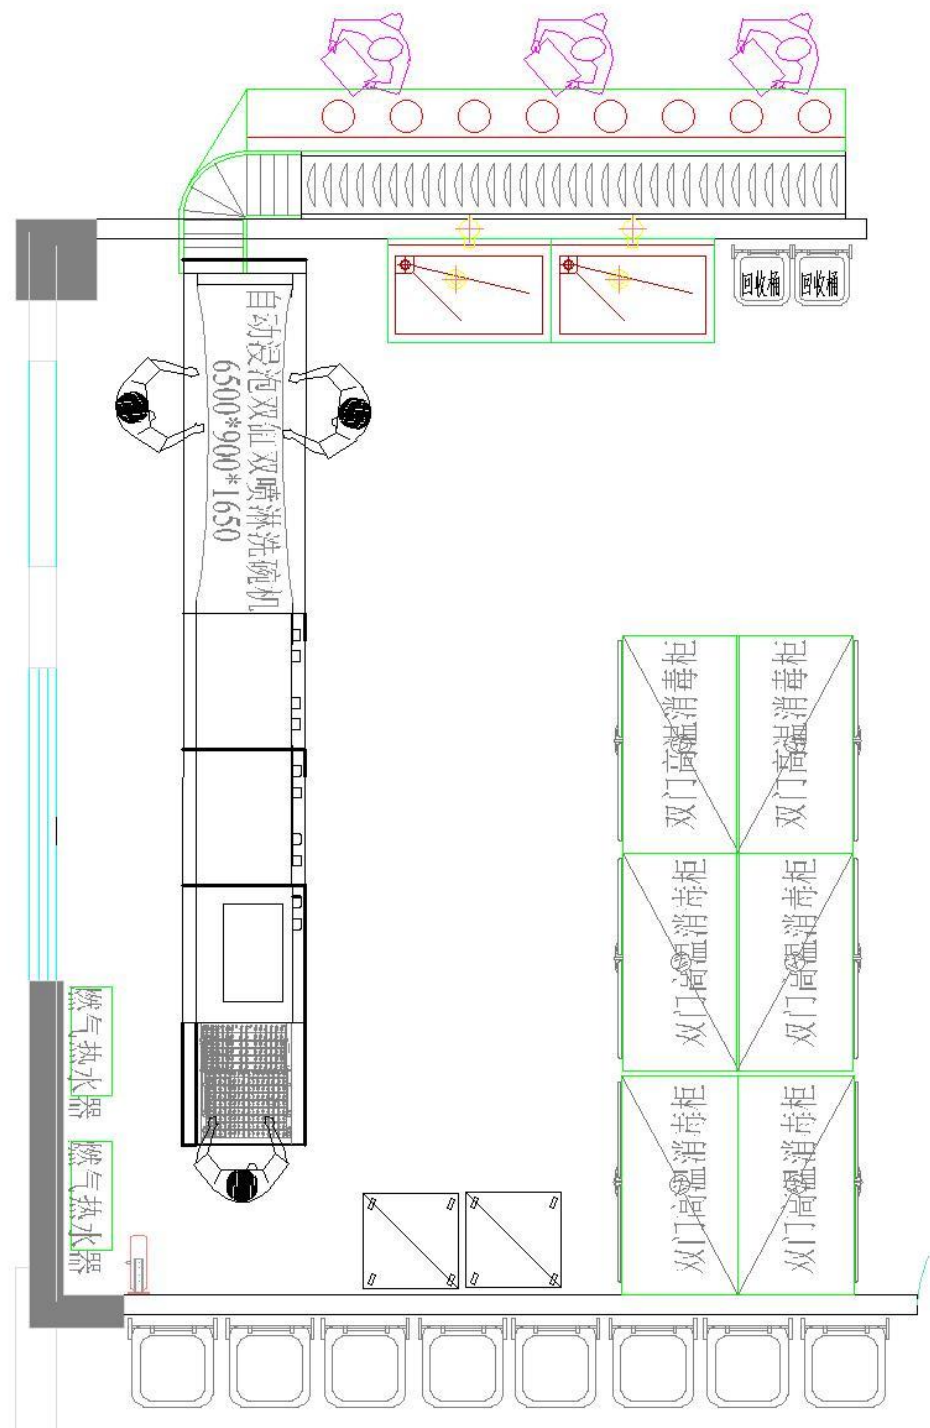

Layout

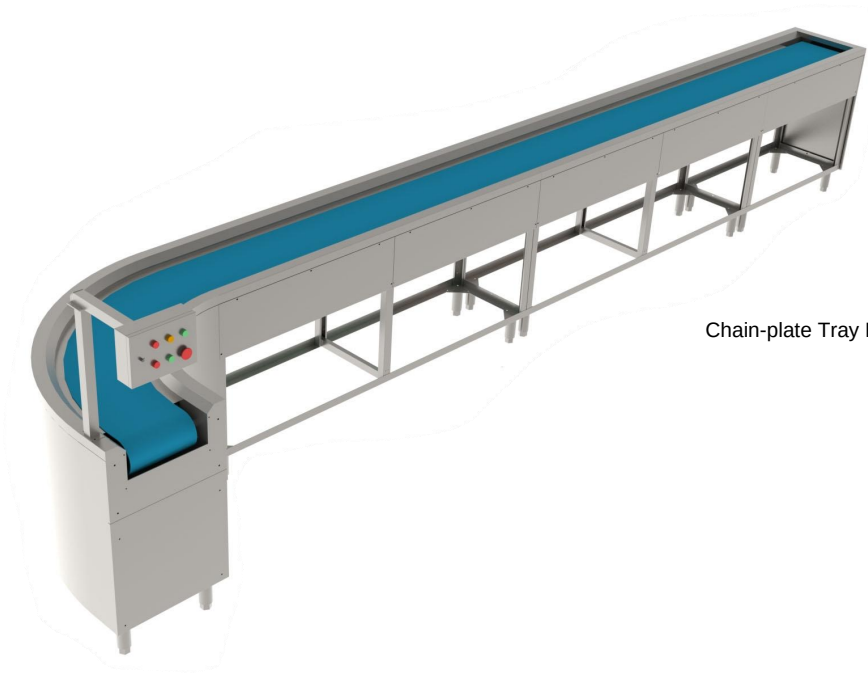

Chain-plate Tray Return Conveyor



Hood Type Dishwasher



PP Chain-plate Conveyor




Rack Conveyor Dishwasher



Packing Area & Meal Distribution Line


Application Layout

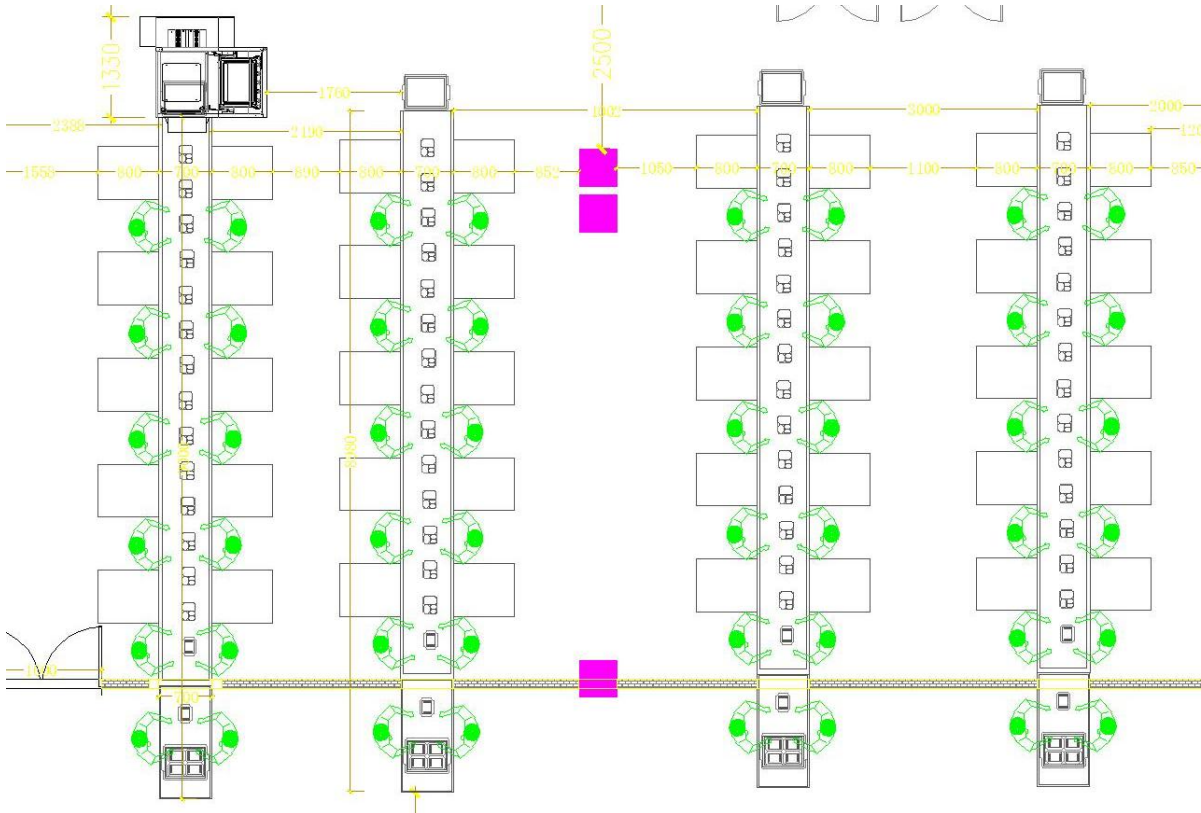

Layout



Meal Distribution Line (Belt Type)

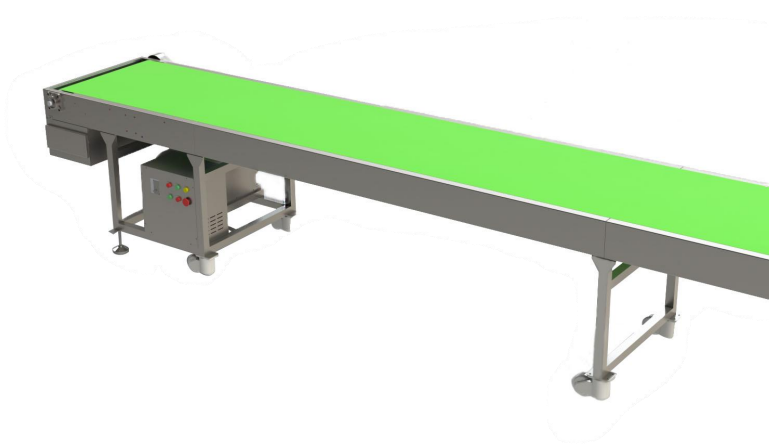

PP Chain-plate Conveyor



Adjustable Mini Countertop Rice Dispenser



Smart Cabinet Rice Dispenser



Central Kitchen Rice Portioning Machine



Roller Conveyor



Roller Conveyor

Exhaust Equipment Series

Products

59/60




NK07-02 Chinese Kitchen Hood



NK-W56-04/05
2 Sides Kitchen Hood



W56-01/02/03
Kitchen Hood

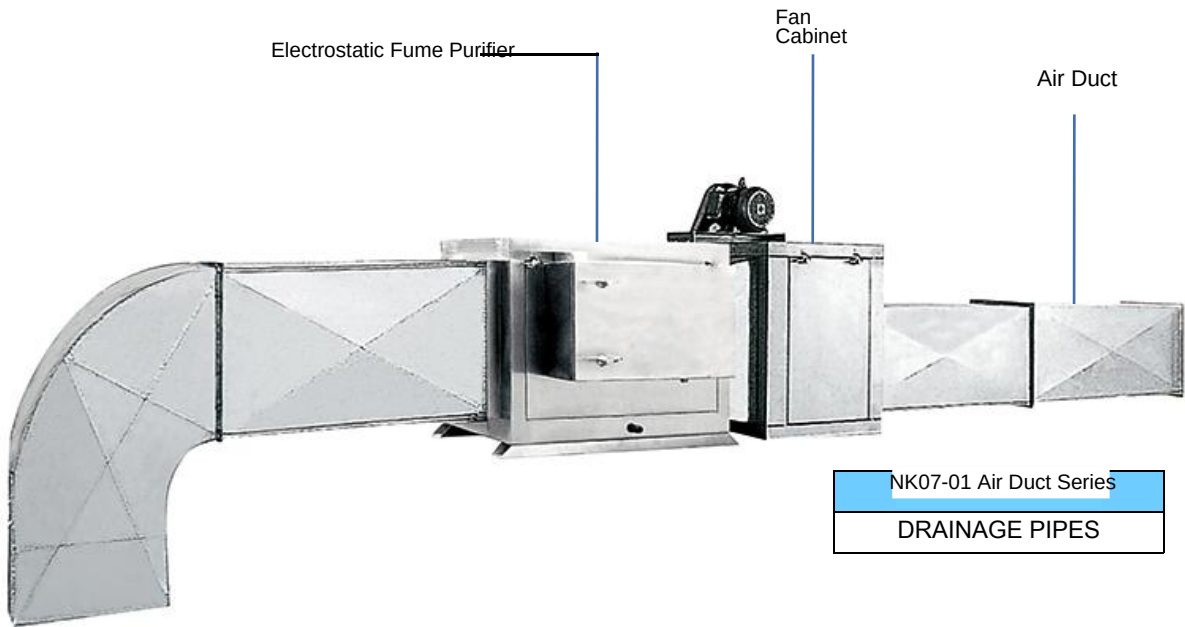

NK07-01 Air Duct Series
DRAINAGE PIPES

NK07-02 Water-wash Hood
Grease Extraction Ventilator



NK-L-01 Water-wash Hood Control Box
Grease Extraction Control BoX

Model	Specification	Voltage	Power	Hood Length (m)	Water Pump
Model	Size.mm	Voltage.V	Power.KW	/	/
NK-GO1	610x300x680	220	0.75	8	1 Unit
NK-L-01	560x510x1600	220	0.75	8	1 Unit
NK-L-02	560x510x1600	220	1.5	16	2 Units
NK-T-01	1000x750x800	220	0.75	8	1 Unit
NK-T-02	1000x750x800	220	1.5	16	2 Units



Axial Cylindrical Fan



Multi-blade Centrifugal Fan



Backward-curved Centrifugal Fan



Low-noise Cabinet Fan



Fire Smoke Exhaust Fan



Electrostatic Catering Fume Purifier



Lampblack Purification Equipment



Model	Specification	Air Volume	Power	Weight
Model	Size.(mm)	Air Volume (m³/h)	Power. (W)	Weight (KG)
NK-216J-4K	735x712x773	4000	400	72.5
NK-216J-6K	735x810x886	6000	450	100
NK-216J-8K	735x871x942.5	8000	490	107.2
NK-216J-12K	735x1394x886	12000	550	140.4
NK-216J-16K	735x1515x942.5	16000	710	153.8
NK-216J-20K	735x1202x1405	20000	820	162.12
NK-216J-25K	735x1202x1405	25000	900	171.52
NK-216J-30K	735x1394x1631	30000	1000	236.85
NK-216J-36K	735x1394x1631	36000	1110	245.95
NK-216J-42K	735x1515x1744	42000	1430	299.2
NK-216J-52K	735x1977x1631	52000	1600	352.8

Model	Specification	Air Volume	Power	Weight
Model	Size.mm	Air Volume(m³/h)	Power(W)	Weight(KG)
NK-216Q-2000	735x871x942.5	2000	490	107.2
NK-216Q-4000	1470x871x942.5	4000	980	214.4
NK-216Q-6000	1470x1394x886	6000	1110	280.8
NK-216Q-8000	1470x1515x942.5	8000	1430	307.6
NK-216Q-10000	1470x1394x1631	10000	2050	474.5
NK-216Q-12000	1470x1394x1631	12000	2220	492.5
NK-216Q-16000	1470x1515x1744	16000	2850	598.4
NK-216Q-20000	1470x1977x1631	20000	3200	705.6
NK-216Q-24000	1470x2160x1744	24000	3600	776.4
NK-216Q-28000	2205x1977x1631	28000	4800	1045.8
NK-216Q-36000	2205x2160x1744	36000	5400	1152Kg